

Rainwater Harvesting



Flat tank TORUS 800 & 1500L*



TORUS – Features

- 3 x connector seals 110mm (1 x fitted, 2 x loose for installer assembly)
- 1 x 300mm opening with seal for PVC pipe or our tank shaft (see accessories).

The TORUS tank is a great alternative to water butts. Being stored underground, water is kept cooler and free from light, this helps maintain water quality. The innovative design provides extremely high underground stability. The various connection points for inlets and overflows and the shallow profile make it ideal for installation and connection to sheds and carports. Whether you use your own method of extracting the water, or our own pump package as detailed below, the TORUS tank is an easy, space saving and long term solution to rainwater storage*.

TORUS - your benefits

- Ideal for quick and easy DIY installation
- Small excavation offers less disturbance to the garden
- Excavation depth less than 1 m
- Can be installed in groundwater to the shoulder of the tank (Observe installation instructions)
- No problems with algae and bugs
- 15 year guarantee

Technical Data / price

Tank type*	Width Ø	height (without shaft)	Order-No.	price / £ incl. VAT	price / £ excl. VAT
TR 800	1500 mm	650 mm	RWTR0800	538.80	449.-
TR 1500	1920 mm	790 mm	RWTR1500	838.80	699.-

Accessories


Professional tank shaft 300mm (dia.), height 40 cm, for inserting into tank opening (height adjustable). Including 50mm rubber seal for cable duct. Double walled insulating PE cover (walk on)

Order-No. RWDS0042 xxx.- £ incl. VAT xxx.- £ excl. VAT



Tank shaft & cover

TORUS Garden system (inc. Tank shaft, cover and pump)

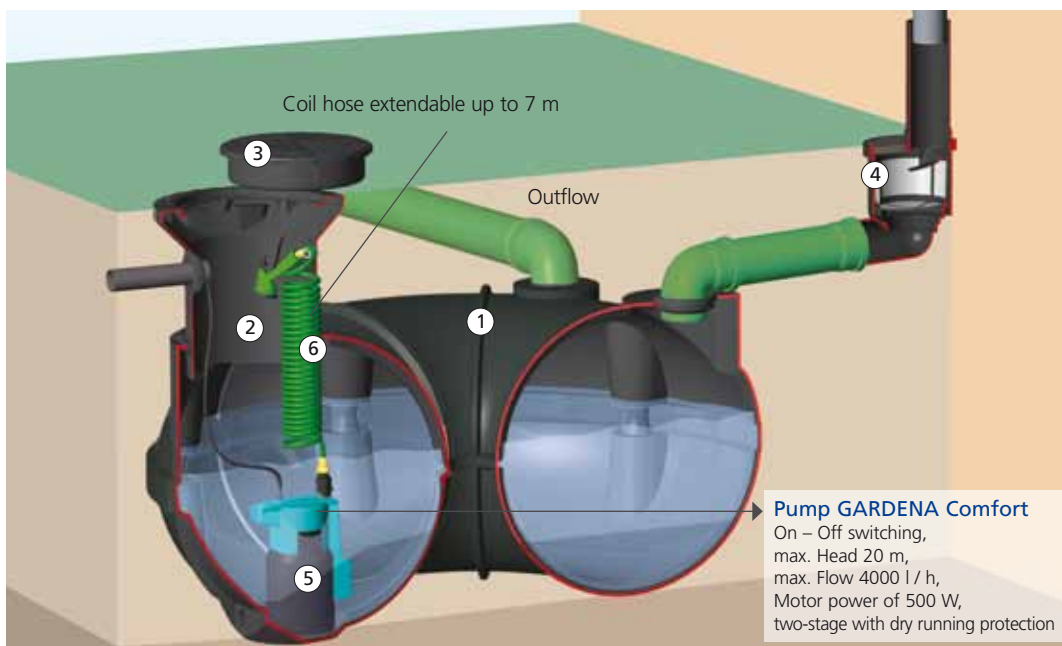

Scope of delivery

- ① Flat tank TORUS
- ② Tank shaft 300mm dia. With 50mm seal for cable duct
- ③ Double-walled and insulated PE cover (walk on)
- ④ Rain-flow filter Ø 200 mm, with filter basket (0.9mm mesh), with lid and pipe holder for connection from downpipe to 110mm tank entry pipe, including wall mounting
- ⑤ Submersible pressure pump GARDENA Comfort (see left)
- ⑥ Coil hose extendable up to 7 m. With 5-way adjustable spray hose nozzle

800 L: Order-No. RWTR0815
price / £ incl. VAT xxx.-
price / £ excl. VAT xxx.-

1500 L: Order-No. RWTR1515
price / £ incl. VAT xxx.-
price / £ excl. VAT xxx.-

Pump GARDENA Comfort
On – Off switching,
max. Head 20 m,
max. Flow 4000 l / h,
Motor power of 500 W,
two-stage with dry running protection

* The nominal volume refers to an overflow connection from above. At lateral overflow connection will reduce the nominal volume by up to 10%